

# LED SHALLOW SHADE - SMALL

A design only made possible by today's LED technology, this fixture will surely captivate its audience with its unobtrusive styling. Coordinates with the 15806.

15805 BKT - Textured Black (Marine grade powder coat)

Cast Aluminum

3 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver

3000K (-200/+125) / 80s CRI

4 W, 5.8 VA

Multiply fixture VA by the number of fixtures used to determine size of transformer

9V-15V AC/DC with no loss in output due to constant current technology

Tested to an L-70 of 40,000 hours

3000K = 140 Lm

3000K = 35 Lm/W

30" of useable #18-2, SPT-1W leads  
Cable connector supplied

8" in-ground stake


15601 - Surface Mounting Flange

15607 - Surface Mounting Bracket

NA

Subjected to Highly Accelerated Life Testing - 3rd party reliability testing. Not for use with electronic transformers

Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
Footcandles	21.2	12.1	5.3	1.56	.23	.33	.11	.06	-

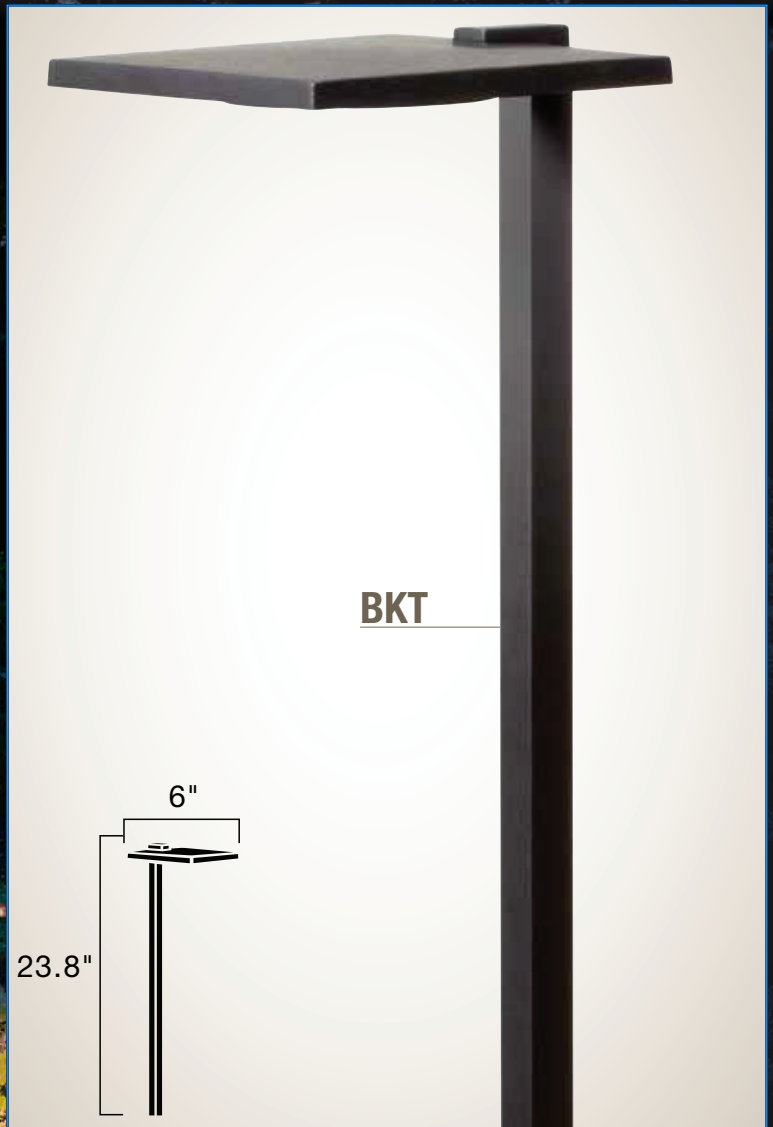

**Guaranteed not to burn out for 15 years (10 commercially)**

POWERED BY  
DESIGN PRO LED  
TECHNOLOGY

WITH  
**Radiax™**  
OPTICS

**Professional-grade LED lighting and system components, designed and engineered for optimum all-weather performance with natural lighting effects, deliver professional results.**

**WT805**

**LandLight**  
Enhance The Night

**Enhance The Night - [www.landlight.ca](http://www.landlight.ca)**